



ARCHITECTURAL HD FIBRE CEMENT PANELS
COLOR SELECTION

www.semprepanel.com
info@semprepanel.com




Engineered Architecturals Ltd.
#400 -319 W Hastings Street
Vancouver, BC V6B 1H6
P.1-800-737-5811
F.1-866-374-6724
E.info@engineeredarchitecturals.com
W.www.engineeredarchitecturals.com


MANUFACTURER'S REP:



Throughout, Always

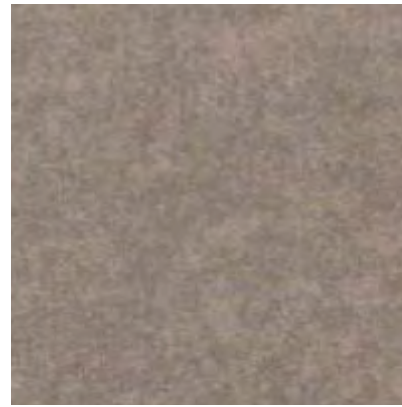

Sandlot Grey

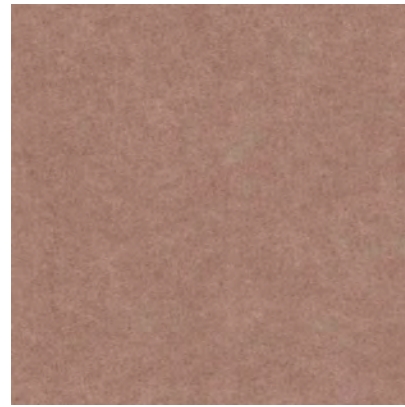


Driftwood




Volcanic Grey




Shoreline Grey

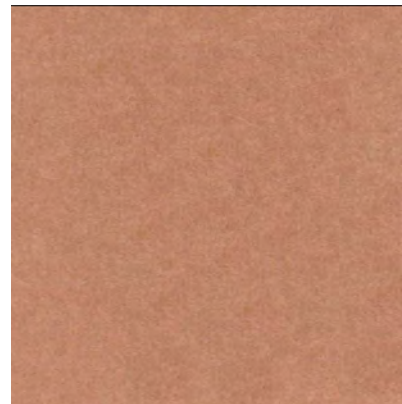

Classic Terracotta

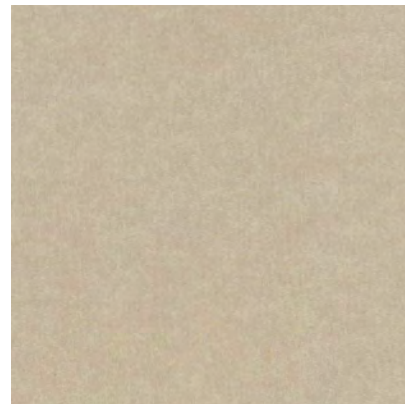


Glacier White

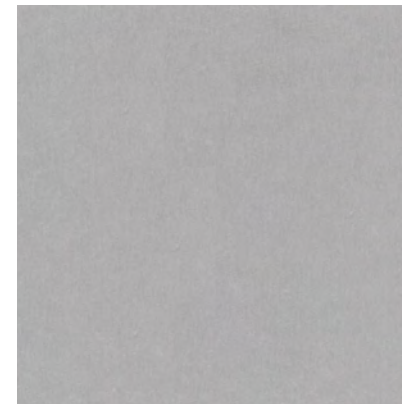


Concrete Grey



Polar White

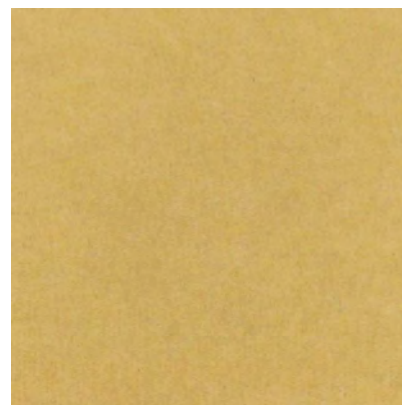


Honeycomb

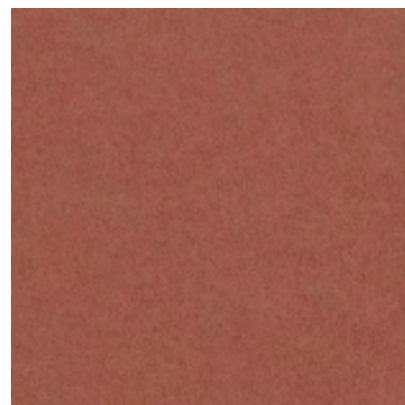

Rustic Brick



River Clay

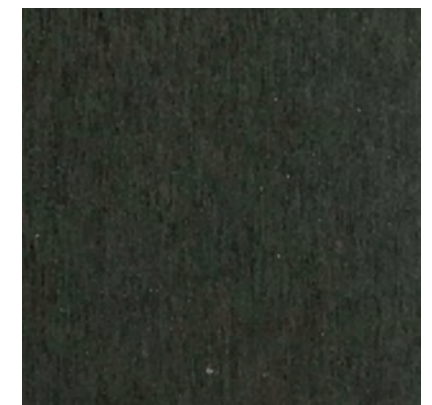

Coal Harbour Black

Sempre Panel™ high density (1,450kg/m³) fibre cement panels are pigmented throughout and are available in sheet form or with project specific shop drawings, waterjet CNC fabrication to exact specification, crating, and delivery to the job site ready for installation.

Silicone based vapor permeable waterproof treatment can be applied locally to all sides as an optional product enhancement. Please note that application of hydrophobization waterproof treatment will deepen and enhance the pigment of the panel. Please ensure to specify untreated or with hydrophobization treatment.

SURFACE FINISH OPTIONS :



#60 Sanded*
Rough Sanded
Grain Texture



#120 Sanded*
Smooth Sanded
Flat & Dull



#120 Polished*
Smooth Sanded & Polished
Flat & Slight Sheen



Polished*
Non Sanded / Polished Only
Uneven Surface & Slight Sheen

*All surface texture images shown are of "Concrete Grey" Panel

Specification	<p>SELECT COLOR FROM CHART</p> <p>9mm Thickness <input type="checkbox"/> 12mm Thickness <input type="checkbox"/></p> <p>#60 Surface <input type="checkbox"/> #120 Surface <input type="checkbox"/> Polished Surface <input type="checkbox"/></p> <p>Pigmented Throughout <input type="checkbox"/> Painted <input type="checkbox"/></p> <p>1220mm x 2440mm STANDARD 1230mm x 3030mm CUSTOM</p>	
Physical Properties	Density:	≥ 1,450 kg/m ³
	Flex Strength Parallel:	8~12MPa
	Flex Strength Cross:	13~20MPa
	Fastener Pull Out:	≥ 68 N/mm ²
	Moisture Movement:	≤ 0.20%
	Water Absorption:	≤ 28% (No Coating)
	Water Contents:	≤ 10% (EMS Condition)
	Thermal Conductivity:	≤ 0.30 w/(m*k)
	Non-combustibility:	CAN/ULC S114 ULC-S135
	Hydrophobization:	Silane / Siloxane Emulsion

NATURAL PRODUCT DISCLAIMER :

Sempre Panel™ Ultra High Density Fibre Cement Panels, created from high-quality raw materials with basic natural aggregate ingredients, vary widely between batches due to their unique mineral composition. Final product may show detectable variation in texture, pigment, and finish depending on the specification which is what makes this product so unique and beautiful.

OUR QUALITY CONTROL DEPARTMENT WILL DO OUR BEST TO MAKE PANELS WITHIN THE SAMPLE RANGE; HOWEVER WE CANNOT MAKE ALL PANELS AN EXACT MATCH TO THE SAMPLE NOR TO EACH OTHER.